

FOculus

Always a new perspective



FO134BIC

FO134BIC

www.net-gmbh.com

IEEE1394 Digital CCD Camera



- *1/2" Progressive Scan CCD Image Sensor*
- *Resolution 330,000 (square pixel) VGA*
- *IEEE1394.a acc. I IDC v.1.31 Interface*
- *FO134B =B/W • FO134C =Color*
- *External Trigger*
- *Frame Rate 86fps*
- *Partial Scan*
- *Camera setting via IEEE1394 Interface*
- *Compact, solid and highly shock-resistant casing*
- *Application:*
 - *Machine Vision*
 - *Semi Con Inspection*
 - *Factory Automation*
 - *Microscopy + Medical*
 - *Quality Control*
 - *Barcode, OCR, OCV*
- *Free Application Software and SDK*


NET
NEW ELECTRONIC TECHNOLOGY

Technical Data

FO134B/C

	FO134B (B/W)	FO134C (Color)
Image Sensor	1/2" IT CCD ICX414AL	1/2" IT CCD ICX414AQ
Effective Pixel	330,000 pixel, 659 (H) x 494 (V) VGA	
Data Path	8bit or 12bit B/W	8bit or 12bit Raw RGB / YUV422
Pixel Size	9.90 (H) x 9.90 (V) μm	
Scanning System	Progressive Scan	
Frame Rate	86fps (format7) / 60 / 30 / 15 / 7.5 / 3.75 / 1.875 fps	
Synchronization	Internal	
Digital Interface	IEEE1394a	
Software Interf.	Acc. IIDC v. 1.31	
Gain Control	Manual: 0 ~ 25 dB; Auto Gain	
Gamma	0.4 ~ 2.5	
Strobe Output	Yes	
S/N Ratio	56 dB or better	
Power Supply	+ 8 VDC to + 30 VDC via the IEEE1394 cable	
Transfer Rate	400 Mbps	
Trigger Mode	Software or External Trigger / Mode 0 ~ 5; 14	
Shutter Speed	Manual: 1 μsec ~ 65 sec; Auto Shutter	
Advanced Features	Pixel Binning (only B/W); RS232 (SIO/Pass through); ROI; One Shot & Multi Shot; Multi Camera Auto Sync	
Operating Temperatur	- 5°C to + 45°C	
Regulations	FCC, CE, RoHS	
Lens Mount	C-mount	
Dimension	64 (W) x 64 (H) x 60 (D)mm / Approx. 300g	

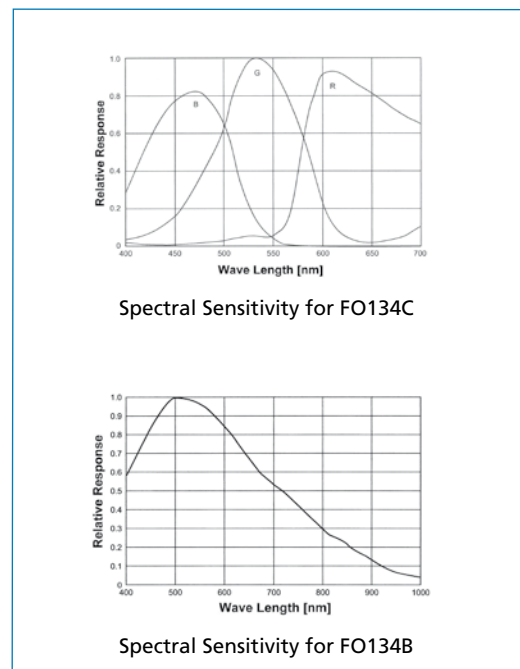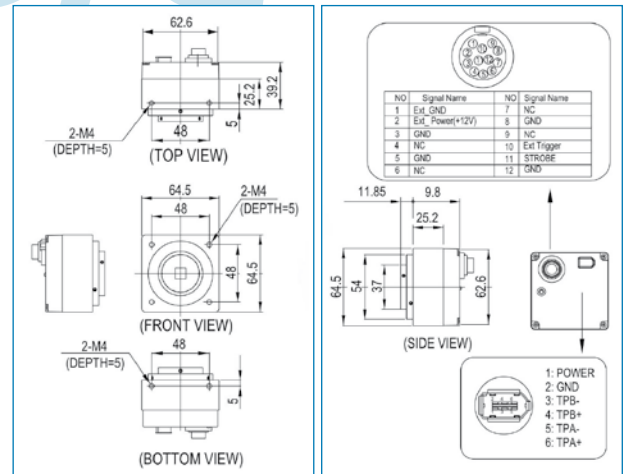

Accessories: • IEEE1394 cable, 6-pin • SDK (Software Development Kit) • OHCI Card • Tripod Adapter Plate • Trigger Cable 12-pin

Contact

New Electronic Technology
 Vertriebsgesellschaft mbH
 Lerchenberg 7 • D-86923 Finning

Fon +49 8806 92 34-0
 Fax +49 8806 92 34-77
 info@net-gmbh.com

www.net-gmbh.com

NET USA, Inc.
 3037 - 45th Street
 Highland, IN 46322

Fon +1 219 934 90 42
 Fax +1 219 934 90 47
 info@net-usa-inc.com

www.net-usa-inc.com

